

The Valla 160SE Slewing Pick & Carry Crane, complete with self-sufficient on board batteries giving a totally fume free operation. The mini crane has a maximum safe working load of 16t and can lift free on wheels or with higher capacities with outriggers deployed.

The mini crane is fitted with a digital load moment limiter and is ideal for lifting duties in constrained space where the ability to lift away from or into locations is important, for example in aviation maintenance.



## 16,000kg

Max Lifting Capacity



CPCS - A66 Compact Crane (B)  
+ Product Familiarisation



### Technical Specifications

Max Lifting Capacity	<b>16,000kg</b>
Max Working Height	<b>11.6m</b>
Max Working Radius	<b>10.5m</b>
Capacity @ Max Height	<b>7,000kg</b>
Capacity @ Max Radius	<b>4,000kg</b>
Power Source	<b>Batteries/Diesel</b>
Height	<b>2846mm</b>
Length	<b>4604mm</b>
Width	<b>2683mm</b>
Total Machine Weight	<b>16,200kg</b>

### Optional Accessories

- Fly jib
- Radio controlled crane functions
- Air conditioning
- Automatic lubrication system
- Bonding reel
- Anti collision with video cameras
- Icao / caa airport standard equipment




**Air conditioning** (optional)



Valla's slewing cranes are designed to provide flexible lifting and versatile work envelope.

### Dimensions

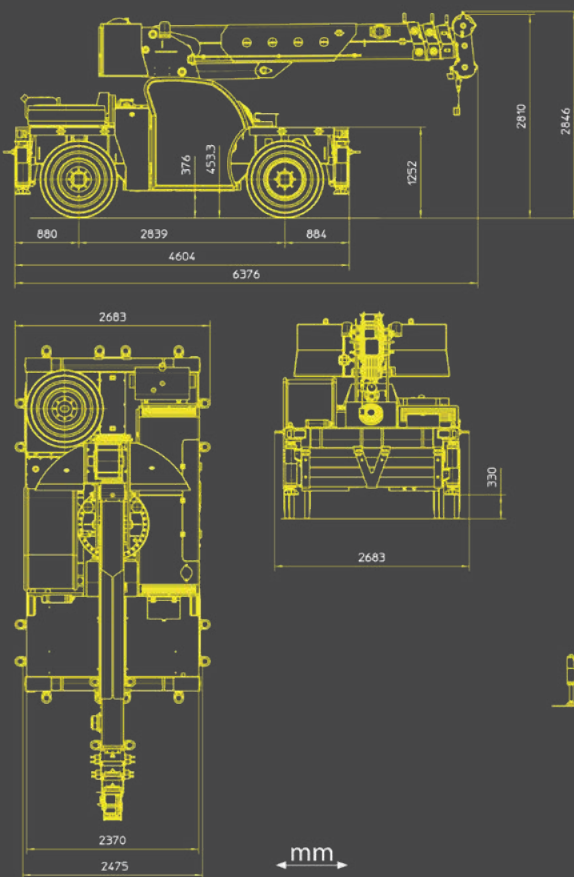

### Working envelope

